



Learn more about
this product



Your Gateway to Efficient Connectivity

Adapter cable with a D-SUB 9 socket connector at one end and an OBD-II (J1962) Type B connector for 24V operation at the other. The OBD-II connector provides access to the on-board diagnostic port, typically located below the steering wheel in cars, and is also used in some trucks and buses. This halogen-free, flame-retardant CAN-bus cable is designed to connect a Kvaser CAN interface or data logger for collecting CAN/OBD-II data.



Warranty

2-Year warranty. See our general conditions and policies for details.



Support

Free support for all products by contacting support@kvaser.com



EAN

73-30130-01407-7

Kvaser OBD-II to D-SUB 9 Adapter Cable 2.5 m

Major Features

- Molded OBD-II (SAE J1962) Type B plug connector that can be connected to both OBD-II receptacle Type B and Type A.
- Molded 9 pin D-SUB socket connector with thumbscrews.
- 2500 mm (approx. 8 ft) long cable made of durable thermoplastic rubber.
- Perfect for Kvaser Memorator, Kvaser Leaf Professional, etc.

Support

At Kvaser, we are committed to providing exceptional support for all our accessories, including cables, SD cards, and mounting brackets. Our dedicated support team is here to assist you with any inquiries or issues you may encounter. Whether you need help with installation, troubleshooting, or compatibility questions, we are here to ensure you have a seamless experience with our products.

Contact Us:


Technical Support: For technical assistance, please reach out to our knowledgeable support team at support@kvaser.com

Documentation and Resources: Access detailed manuals, FAQs, and troubleshooting guides on our website at www.kvaser.com/support

Warranty and Repairs: For warranty information and repair services, please visit www.kvaser.com/warranty

Technical Data

CAN Channels	1
Connector	ODB-II Type B D-SUB 9 socket
Length	2500 mm
Material	Thermoplastic polyurethane
Operating Temperature Range	-40 to +85 °C
Regulatory Compliance	CE
Strain Relief	Reinforced
Weight	170 g

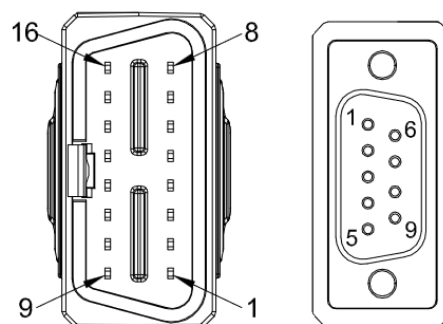

OBD-II Type B	Signal Name	D-SUB 9
4	GND	3
16	V+	9
6	CAN_H	7
14	CAN_L	2